



®

# PUMPS & METERS



**NEW RELEASE  
FROM GPI!  
JANUARY 15<sup>TH</sup>, 2010**


GPI offers a full line of gasoline transfer pumps, diesel transfer pumps and fuel meters designed specifically for agricultural fueling, construction fueling and fleet fueling applications. GPI products are designed, engineered and tested to exacting standards before being introduced to the market. Products are 100% functionally tested to ensure years of dependable service.



Part No. 110700-01  
**M-150S-METHANOL  
PUMP - 15 GPM**

Part No. 137700-01  
**EZ-8-METHANOL  
PUMP - 8 GPM**

## ELECTRIC PUMPS 12 - Volt

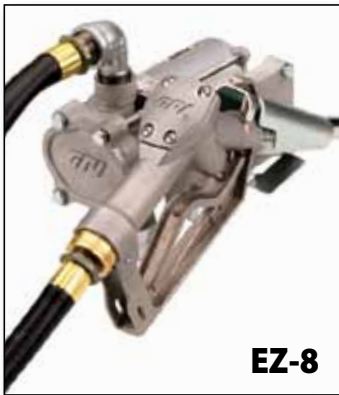

**EZ-8**



**M-150S**



**M-180S**



**M-3025**

Model	Part No.	Flow Rate	Duty Cycle	Nozzle	Inlet/Outlet	Suction Pipe	Hose	Feature
<b>EZ-8</b>	137100-01	Up to 8 GPM (30 LPM)	15 min. On / 30 min Off	Only available w/ manual shut off nozzle	3/4 in. / 3/4 in.	3-piece, Trim-to-fit	10 ft. (3.0m) x 5/8 in.	Gas station equivalent flowrate - direct tank mounting
<b>M-150S</b>	110000-99 w/manual nozzle 110000-100 w/auto nozzle	Up to 15 GPM (57 LPM)	30 min. On / 30 min. Off	Available w/ Manual or Auto Shut off nozzle	3/4 in. / 3/4 in.	Adjustable to 40 in.	12 ft. (3.7m) x 3/4 in.	Convenient Spin Collar for easy installation
<b>M-180S</b>	110300-1 w/manual nozzle 110300-2 w/auto nozzle	Up to 18 GPM (69 LPM)	30 min. On / 30 min. Off	Available w/ Manual or Auto Shut off nozzle	1 in. / 1 in.	Adjustable to 40 in.	12 ft. (3.7m) x 1 in.	Improved flowrate and convenient Spin Collar
<b>M-3025</b>	133240-1 w/manual nozzle 133240-2 w/auto nozzle	Up to 25 GPM (95 LPM)	30 min. On / 30 min. Off	Available w/ Manual or Auto Shut off nozzle	1 in. / 1 in.	None	12 ft. (3.7m) x 1 in.	Highest flow, 12-volt pump, reduces time spent refueling

[www.gpi.net](http://www.gpi.net) • [www.customtruckpartsinc.com](http://www.customtruckpartsinc.com)

# PUMPS & METERS



## ELECTRIC PUMPS 115 - Volt



**M-1115S**



**M-3120**



**M-3130**

Model	Part No.	Flow Rate	Duty Cycle	Nozzle	Inlet/Outlet	Suction Pipe	Hose	Feature
<b>M-1115S</b>	110000-81 w/manual nozzle 110000-82 w/auto nozzle	Up to 12 GPM (45 LPM)	30 min. On / 30 min. Off	Available w/ Manual or Auto Shut off nozzle	3/4 in. / 3/4 in.	Adjustable to 40 in.	12 ft. (3.7m) x 3/4 in.	Designed for stationary locations in fleet, agriculture or light industrial applications
<b>M-3120</b>	133200-1 w/manual nozzle 133200-2 w/auto nozzle	Up to 20 GPM (75 LPM)	30 min. On / 30 min. Off	Available w/ 3/4 in. Manual or Auto Shut off nozzle	3/4 in. / 3/4 in.	None	12 ft. (3.7m) x 3/4 in.	External switch coverplate allows for easy access and keeps the UL rating intact
<b>M-3130</b>	133220-1 w/manual nozzle 133220-2 w/auto nozzle	Up to 30 GPM (114 LPM)	30 min. On / 30 min. Off	Available w/ 1 in. Manual or Auto Shut off nozzle	1 in. / 1 in.	None	12 ft. (3.7m) x 1 in.	Unique strainer and poppet design allows for easy access and maintenance

## METERS

Model	Part No.	Flow Range	Accuracy	Inlet/Outlet	Display	Feature
<b>FM-530</b>	126000-21 (3/4" NPT, litres) 126000-23 (1" NPT, litres) 126000-27 (1.5" NPT, litres)	5-30 GPM (19-114 LPM)	+/- 2% of reading	3/4 in., 1 in. or 1-1/2 in. NPT or BSPP available	Max. Batch Total is 4-digits	Large, easy to read display with push button reset
<b>01A-SERIES</b>	113255-2 Digital Inline Meter	3-30 GPM (10-100 LPM)	+/- 2.5% of reading (accuracy can vary to +/- 5%)	1 in. NPT w/3/4 in. reducer fittings available	Max. Batch Total is 4-digits	Weighs just 12 oz. to mount at the hose end



**FM-530**



**113255-2**

## SECURITY COLLAR

- Fits pre-vent cap & pump base to stop fuel theft
- Locking mechanism accepts standard Master® lock or the Master® 40 lock
- Mounts on GPI Electric Pumps w/spin collar
- Economical theft deterrent
- Synthetic polymer thermoplastic material



**11080801**